

# Connect 2024



## In/On Surface • Flush Mount

### Duet (Hidden Mount)



ADUH-1P1UC-120-S



#### Standard Features:

- For use in work surface applications
- Receptacle configuration options:
  - 1 Power/1 USB /1 USB-C
- AC receptacles with Spill-Proof Technology
- 1 Dual USB charging port, 2 amps each port
- UL listed
- Hidden Mount
- 72" and 120" cords available

Configuration:



Colors:



2

### Duet (Facemount)



ADUF-1P1UC-120-W




#### Standard Features:

- For use in upholstered surface applications
- Receptacle configuration options:
  - 1 Power/1 USB /1 USB-C
- AC receptacles with Spill-Proof Technology
- 1 Dual USB charging port, 2 amps each port
- UL listed
- Face Mount
- 72" cords available

Configuration:



Colors:



## Ensemble



AEMB-2P1UC-72-B

### Standard Features:

- Versatile. Compact, low profile design
- Receptacle configuration options:  
2 Power / 1 USB / 1 USB-C
- Models have tamper-resistant receptacles to keep little fingers away from danger
- Fast Device Charging. Two USB charging ports (5V, 3.1A total) ensuring that all of your devices charge as quickly as possible
- UL Spill Water Compliant. Passed UL 962A spill water test requirements so it can even be used in a horizontal surface such as a table top
- Available in three attractive finishes: black, white and nickel, so you can match or complement any furniture style. Included bezel hides the mounting screws for a cleaner look
- Pass-thru plug allows you to connect the power center to any outlet, even one that is already being used
- 72" and 120" cords available

Configurations:



-2P1UC

Colors:



White Black Nickel

## Aztech



AZ-2P1UC10-120-B

### Standard Features:

- For mounting in hard or upholstered surfaces
- Receptacle configuration options:  
2 Power / 1 USB / 1 USB-C / 1 Open Port\*
- AC receptacles with Spill-Proof Technology
- UL listed solution
- Vertical or horizontal mounting
- O.D. 8.125" x 3" (fits 6.625 x 1.875" cutout)
- Cutout for upholstered application may vary
- 72" and 120" 15 amp cords available

Configuration:



-2P1UC10

Colors:



Black Face/ Black Trim Silver Face/ Black Trim

\*Open Port configuration includes a voice/data port adapter kit. See page 17.



2 Aztechs mounted in a Downtown table top.

# In/On Surface • Monument

Any products that come with an 80mm grommet can utilize the electrical units below without any additional cut outs.

## Sparky




SPK-1P1U1WCS-72-B

### Standard Features:

- Offers wide-ranging functionality with clean, modern design for a powerful all-in-one solution
- Receptacle configuration options:
  - 1 Power / 1 USB / 1 Wireless Charging Surface
- Compatible with all Qi enabled smart phones and devices
- 5 Watt Qi Charging Coils
- 15 Amp Power Simplex
- Single Port USB, 2 Amps
- 3" diameter cutout in work surface
- Gloss plastic with Qi charging inserts
- 72" and 120" 15 amp cords available

Configurations:



-1P1U1WCS

Colors:



## Jolt




AJLT-4P-72-W

### Standard Features:

- Receptacle housing: high gloss plastic finish
- Receptacle configuration options:
  - 4 Power
  - 2 Power / 1 Dual USB / 1 USB-C
- UL and CUL listed
- Available with 2 amp dual USB
- AC receptacles feature Spill-Proof Technology
- Hole cut out dimensions: 3" diameter
- Fixture depth suitable for table tops 0.75"-1.5" thick
- 72" and 120" cords available

Configurations:



-4P

-2P1UC10

Colors:



**Note: The -4P models require a plug with an integrated transformer that will not pass through table legs!**

## Port



APRT-2P-120-W

### Standard Features:

- Clean and simple flush mount design that complements a wide range of aesthetics
- For mounting in hard surface
- Bezel and receptacle housing: molded plastic
- Receptacle configuration options:
  - 2 Power
  - 1 Power / 1 USB / 1 USB-C
- USB charging ports 2 amps each
- UL and CUL listed
- AC receptacles with Spill-Proof Technology
- 72" and 120" cords available (we suggest 120" for most applications)


Configurations:



-2P

-1P1UC

Colors:





# In/On Surface • Monument Backstop



ABTP-2P1UC-72-W

## Standard Features:

- Offers sleek and easy-to-install solutions that mount directly on surfaces and minimize cord clutter
- Receptacle configuration options:  
2 Power / 1 USB-A / 1-USB-C
- Smart charging capability that recognizes devices and when to shut off during peak loads
- Easy connection to power sources. 72" (1.83m) 14 gauge pass-through cord easily reaches walls and floors
- Supports tables from 0.5" to 1.5" for the clamp mount. Under table bracket mount supports 1" to 1.5"
- 72" cords available



\*Shown in various mounting configurations.

Configurations:



Colors:



# Standley



STND-2P1UC/4P-72-B

## Standard Features:

- Compatible with all standard sit/stand desk height ranges
- Includes one plug-in outlet center, one Desktop Power Center Slim and one 6' coiled cord
- Receptacle configuration options:  
2 Power / 1 USB / 1 USB-C (above surface) +  
4 Power (below surface)
- Options for horizontal and vertical applications
- UL 962A Spill Water Compliant and can be used in a horizontal surface such as a tabletop

Configuration:

-2P1UC/4P



Colors:



# In/On Surface • Monument

## Charge Up Dual



AMX-4P2U2C2O-72-SAWT

\*Open Port configuration includes a voice/data port adapter kit. See page 17.

### Standard Features:

- Dual flip up
- Bezel and receptacle housing: anodized aluminum
- Receptacle configuration options:
  - 2 Power / 1 USB / 1 USB-C / 1 Open Port
- UL listed
- AC receptacles with Spill-Proof Technology
- USB charging ports 2 amps each
- Fits 7.8125" x 7.5455" cutout
- 72" and 120" 15 amp cords available

Configurations:



-4P2UC2O

Colors:



-SAWT  
Silver  
Powder Coat/  
White Trim

6

## Dart



ADRT-1P1UC-W

### Standard Features:

- Highly configurable: for use on or under work surfaces
- Receptacle configuration options:
  - 1 Power / 1 USB / 1 USB-C
- Tamper-Resistant Receptacles: Tamper-resistant receptacles protect users and devices from damage or risk of injury.
- Combo USB: Available with a combo 15W USB-A and USB-C port
- ETL listed
- 72" and 120" cords available

Configurations:



-1P1UC

Colors:



White Black



# In/On Surface • Monument Grover



AGRV-2P2UC-B-96

## Standard Features:

- Free-standing connectivity tower for convenient access to power and charging of devices.
- Receptacle Configuration:  
2 Power / 2 USB-A / 2 USB-C
- 3' tall power tower designed to accommodate seated areas for convenient power access.
- Tamper-resistant receptacles to prevent users from injury.
- Available in black and white.
- Overall dimensions: 9.2"D x 9.2"W x 35.75"H
- Complies with FCC Part 15, Subpart B.
- 8' self-retracting power cord.



Configuration:



-2P2UC

Colors:



White Black

# Track Star



TSTR-2P-72

## Standard Features:

- Perfect for conference rooms, lecterns, desks and more
- Receptacle configuration options:  
2 Power / 4 Data Ports
- Accommodates a single power/data point with a single circuit
- Always includes 2 power outlets, 4 data ports and low-profile transition ramps
- Clear Anodized finish
- Available in 6' and 12' lengths
- ADA compliant and tested to UL standards 962A in US and C22.2 #21 in Canada

Configurations:



-2P

Colors:



Black

# Power Strips • Plug In Outlet Centers

## Heavy Duty Outlet Center



HDPS-6P


### Standard Features:

- User ready outlets provide power distribution in a portable, plug-in unit
- Receptacle configuration options:
  - 6 Power
- Durable 2" x 1 3/4" [44mm x 51mm] or 3 1/2" x 2" [89mm x 44mm] aluminum housing. Some units are available with an impact resistant plastic housing
- Rack mount units fit standard 19" [482mm] relay racks
- Compact 1U design takes up minimum space
- Low profile. CabinetMATE units offer a narrow 1 1/2" x 1 3/16" [38mm x 20mm] aluminum housing
- 72" cords available

Configurations:



Colors:



## Plastic Plug-In Outlet Center



PPOC-4P1UC

### Standard Features:

- This Plug-In Outlet Center offers power outlets and USB ports in a slim profile, keeping laptops and electronics charged and ready for work
- Receptacle configuration options:
  - 4 Power / 1USB / 1USB-C
- User-ready: Power outlets and USB ports are housed in a portable, plug-in unit
- Available with USB-C PD & USB-A
- Total output of 20 Watts
- Surge protected LED indicator
- Easy-to-spot surge protection for users
- 72" cords available

Configurations:



Colors:



## P6 Power Strip



P6PS-6P

### Standard Features:

- Includes six outlets in a putty white impact-resistant housing
- Polymeric / 120 volts
- Receptacle configuration options:
  - 6 Power
- Delivers 15A of power with a lighted switch
- Includes 6ft 14/3 SJT white cord with NEMA 5-15 plug
- 72" cords available

Configurations:



Colors:





# Modular Systems

## ModuLink



MDS-3P1UC

### Standard Features:

- Create a system of power for workstations, training and flexible workspaces. Easily connect up to six power units together with our sleek, slim and unobtrusive modular, code compliant ModuLink.
- Receptacle configuration options:  
3 Power / 1USB / 1USB-C
- Models include three 15A receptacles, one USB Type-A port and one USB Type-C port for 15W of shared power
- Easy installation for quick changes and moves
- Power and charging combinations that get the job done
- Models include three 15A receptacles, one USB Type-A port and one USB Type-C port for 15W of shared power
- Jumper Cable accessory to add length to any system
- Sleek, slim design fits unobtrusively on work surfaces
- Each unit includes cord clips for cable management to keep the space tidy
- Passed UL 962A spill water test requirements and can be installed in a horizontal surface such as a tabletop
- This device complies with FCC Part 15, Subpart B
- Fits 2.25" x 7.15" cut out
- Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation



Configurations:



Colors:




MDT-3P1UC  
Termination Unit



MDE-3P1UC  
Middle Unit



MDS-3P1UC  
Starter Unit

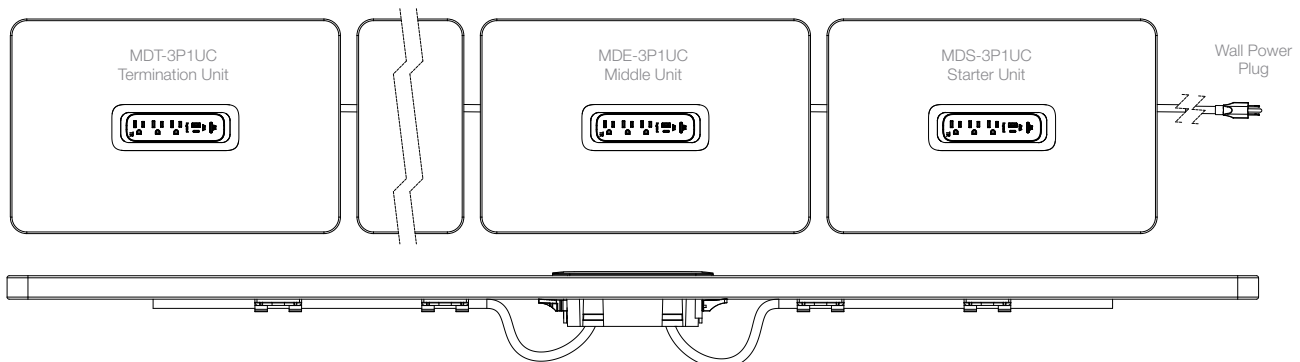

# Modular Systems

## ModTrak 4



Shown mounted beneath table top


**1C = Single Circuit**  
**2C = Two Circuit**

### Standard Features:

- Mount below worksurface, in troughs, or in the panels of your cubicle jungle
- 4 wires, 1 or 2 circuits, 20 amps each (Circuit 1 and 2 only depending on power entry)
- 13 - Duplex receptacles per circuit
- 26 - 15 Amp duplex receptacles per power infeed maximum
- Easy to install and reconfigure
- Requires less space
- UL recognized as an office furnishing accessory
- UL Listed as Manufactured Wiring System
- More economical than 8-Wire System


### 36" Table Kit

Model Number: MT-4T-36-1C  
Model Number: MT-4T-36-2C

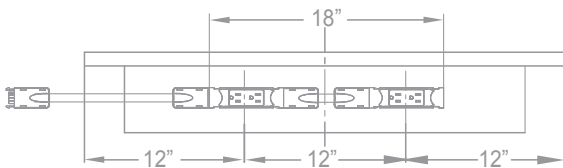


### 48" Table Kit

Model Number: MT-4T-48-1C  
Model Number: MT-4T-48-2C

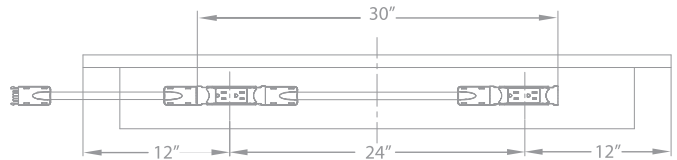


### 60" Table Kit

Model Number: MT-4T-60-1C  
Model Number: MT-4T-60-2C



### 72" Table Kit


Model Number: MT-4T-72-1C  
Model Number: MT-4T-72-2C



**Each kit includes (2) Duplexes, (2) Jumper-M's and (2) Mounting Brackets.**


# ModTrak 4

## Single Circuit Power Entry Options

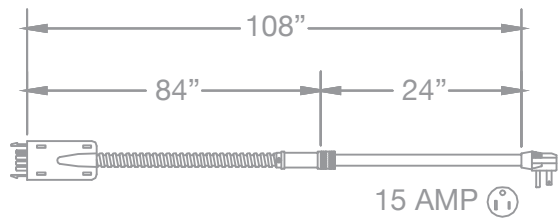


### Model Number: SCPE-108-15AMP-90

- Powers up to (8) 15 AMP #1 Circuit duplexes
- Plugs into any 15 AMP wall or floor receptacle
- 90° plug for vertical drop

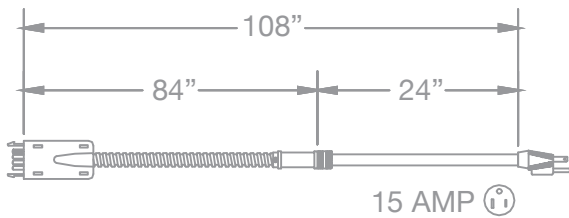


### Model Number: SCPE-108-15AMP

- Powers up to (8) 15 AMP #1 Circuit duplexes
- Plugs into any 15 AMP wall or floor receptacle

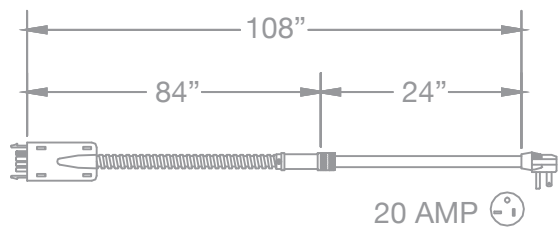

### Model Number: SCPE-108-20AMP-90


- Powers up to (13) 15 AMP #1 Circuit duplexes
- Plugs into any 20 AMP wall or floor receptacle. (Be sure to confirm availability at final location)
- 90° plug for vertical drop

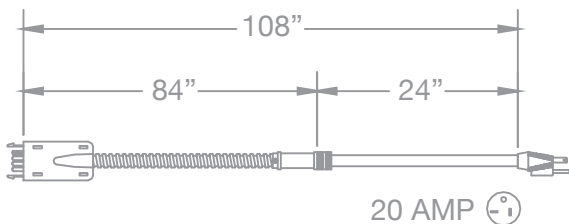

### Model Number: SCPE-108-20AMP


- Powers up to (13) 15 AMP #1 Circuit duplexes
- Plugs into any 20 AMP wall or floor receptacle. (Be sure to confirm availability at final location)

## Two Circuit Power Entry Options



### Model Number: MT-4T-MLPE-72

- Powers up to (26) 15 AMP #1 Circuit duplexes
- Evenly split between #1 and #2 circuits.
- Must be hardwired by an electrician

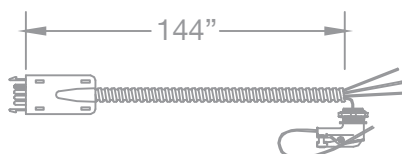

### Model Number: MT-4T-MLPE-144

- Powers up to (26) 15 AMP #1 Circuit duplexes
- Evenly split between #1 and #2 circuits.
- Must be hardwired by an electrician

# Modular Systems

## ModTrak 4

POWER ENTRY TYPE	CIRCUITS	DUPLEX SUPPORT	FACILITY SERVICE REQUIRED	SPECIAL NOTES
15 AMP STRAIGHT PLUG	1	UP TO 8	15 AMP WALL OR FLOOR OUTLET	
15 AMP RIGHT ANGLE PLUG	1	UP TO 8	15 AMP WALL OR FLOOR OUTLET	
20 AMP STRAIGHT PLUG	1	UP TO 13	20 AMP WALL OR FLOOR OUTLET	CONFIRM OUTLET IS 20 AMP
20 AMP RIGHT ANGLE PLUG	1	UP TO 13	20 AMP WALL OR FLOOR OUTLET	CONFIRM OUTLET IS 20 AMP
20 AMP HARDWIRE	2	UP TO 26	WALL OR FLOOR BOX WITH TWO 20 AMP CIRCUITS	REQUIRES ELECTRICIAN HOOK UP

### Jumper-F



JMF-18

Model Number: JMF-\_\_




- 18", 22", 24", 30", 36", 42", 48" available lengths

### Mounting Bracket



MT-4C-MBK

Model Number: MT-4C-MBK



- Aluminum mounting bracket
- 2 hex head screws

### Points to Consider

- The environment in which the modular system is installed will dictate which selection you must choose unless an electrician is present.
- Each electrical run must be supported by only one power entry device. This means that if power is in the middle of a run you will need two power entries and two runs.
- The run must be continuous, without interruption.
- The sizing of the kits or individual components must be calculated to fit the application. Jumpers of appropriate length are critical. Kits are primarily meant for tables but can be used in longer applications. If kit is used in a larger application and more distance is required, you must select a kit with longer jumpers and/or order the components separately.
- The #1 circuit is supported by all power entry devices, the #2 circuit can only be activated using the hardwire power entry device, requiring an electrician.
- The furniture being specified must allow passage of the cables from one unit to the next.

### ModTrak4 Selection Process


- Review intended furniture layout.
- Determine the number of duplex receptacles required.
- Select Power Entry Type.
- Select from Kit or component listing.

## ModTrak 4


Kit Example (shown on underside of table run):

- #1 Power Entry
- #2 Power Entry
- Single Circuit Kit
- Two Circuit Kit

### SINGLE CIRCUIT

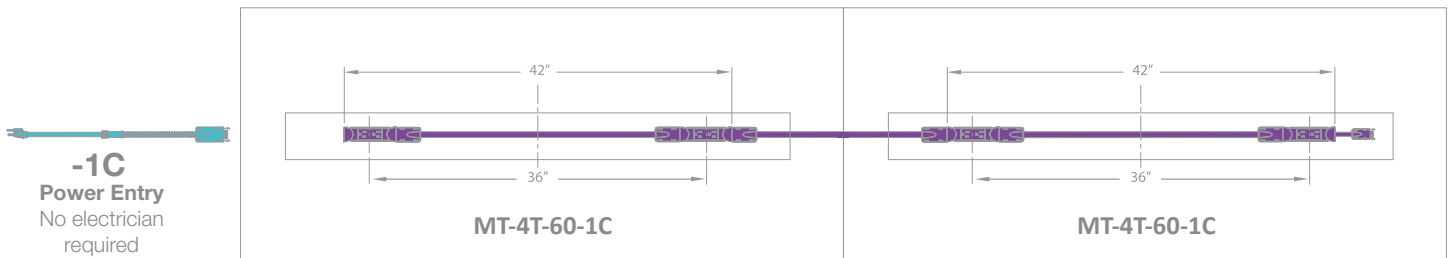

### TWO CIRCUIT

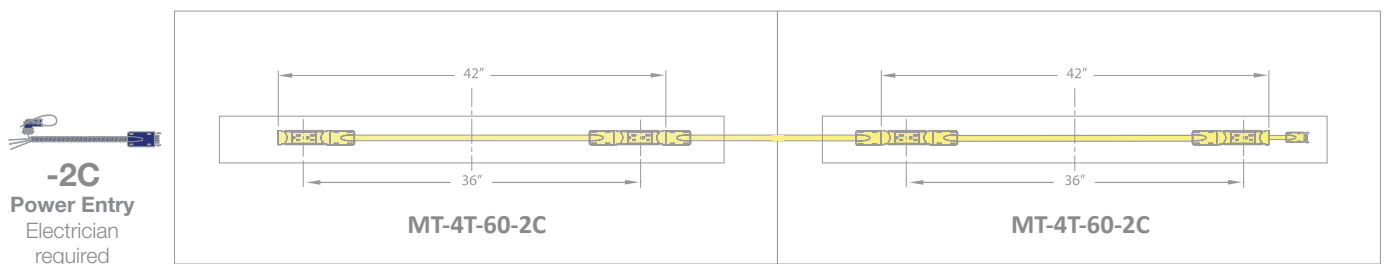




# ModTrak4

**Kit Example**  
(shown on underside of circulation desk):

SINGLE CIRCUIT

**-1C**  
Power Entry  
No electrician  
required

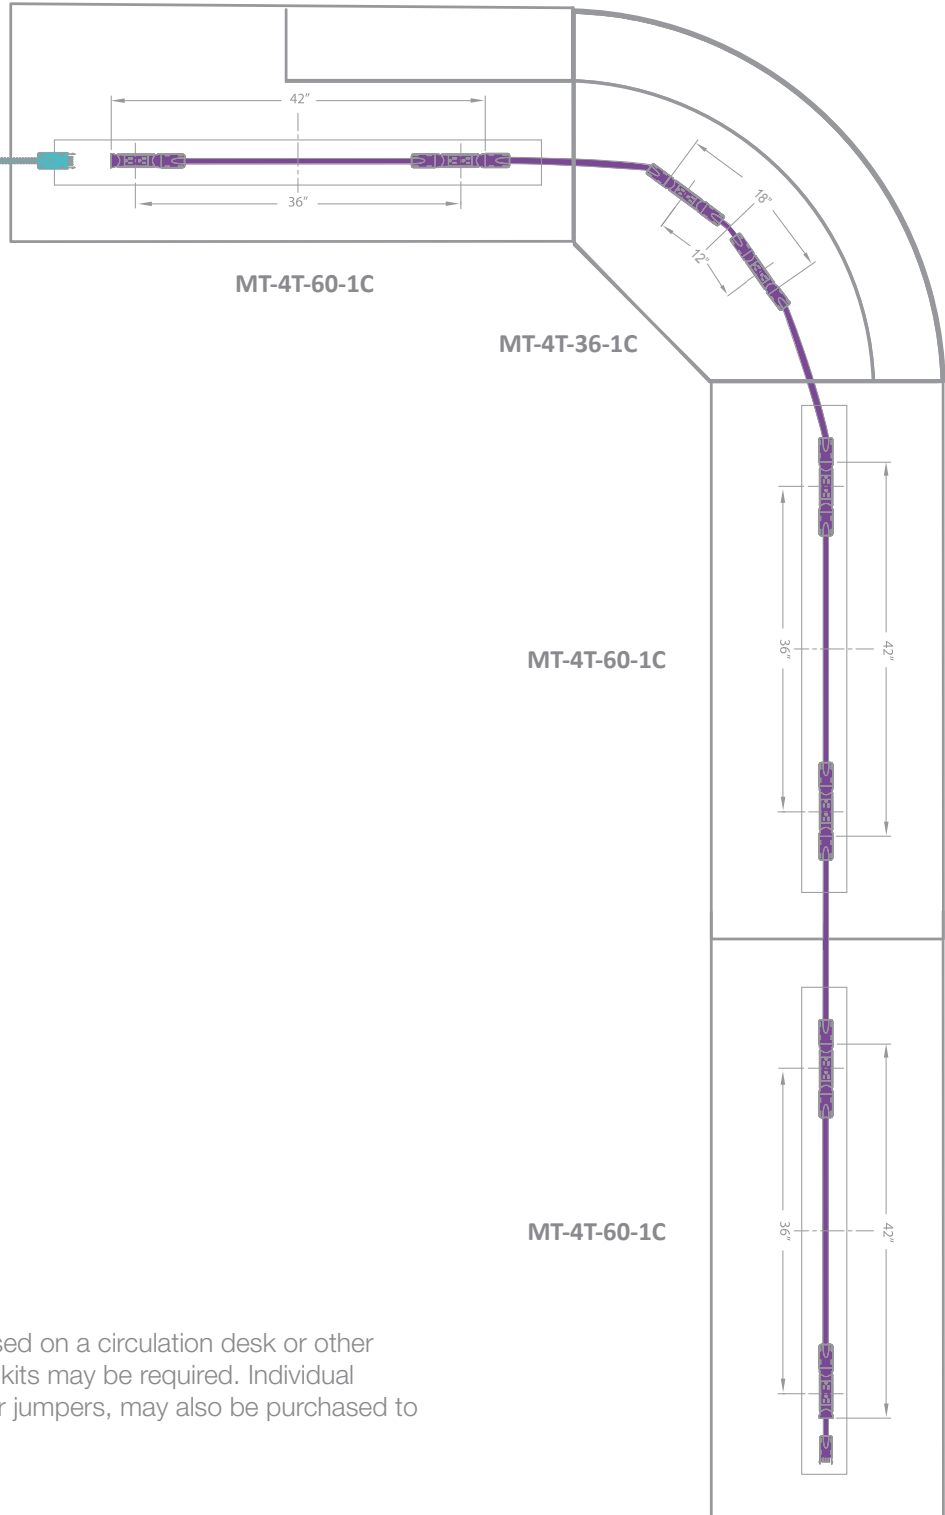

- #1 Power Entry
- Single Circuit Kit

**Note:** When ModTrak4 is used on a circulation desk or other lengthier application, longer kits may be required. Individual components, such as longer jumpers, may also be purchased to extend the length of the kit.


# ModTrak 4

## Kit Example

(shown on underside of circulation desk):

TWO CIRCUIT

**-2C**  
Power Entry  
Electrician  
required

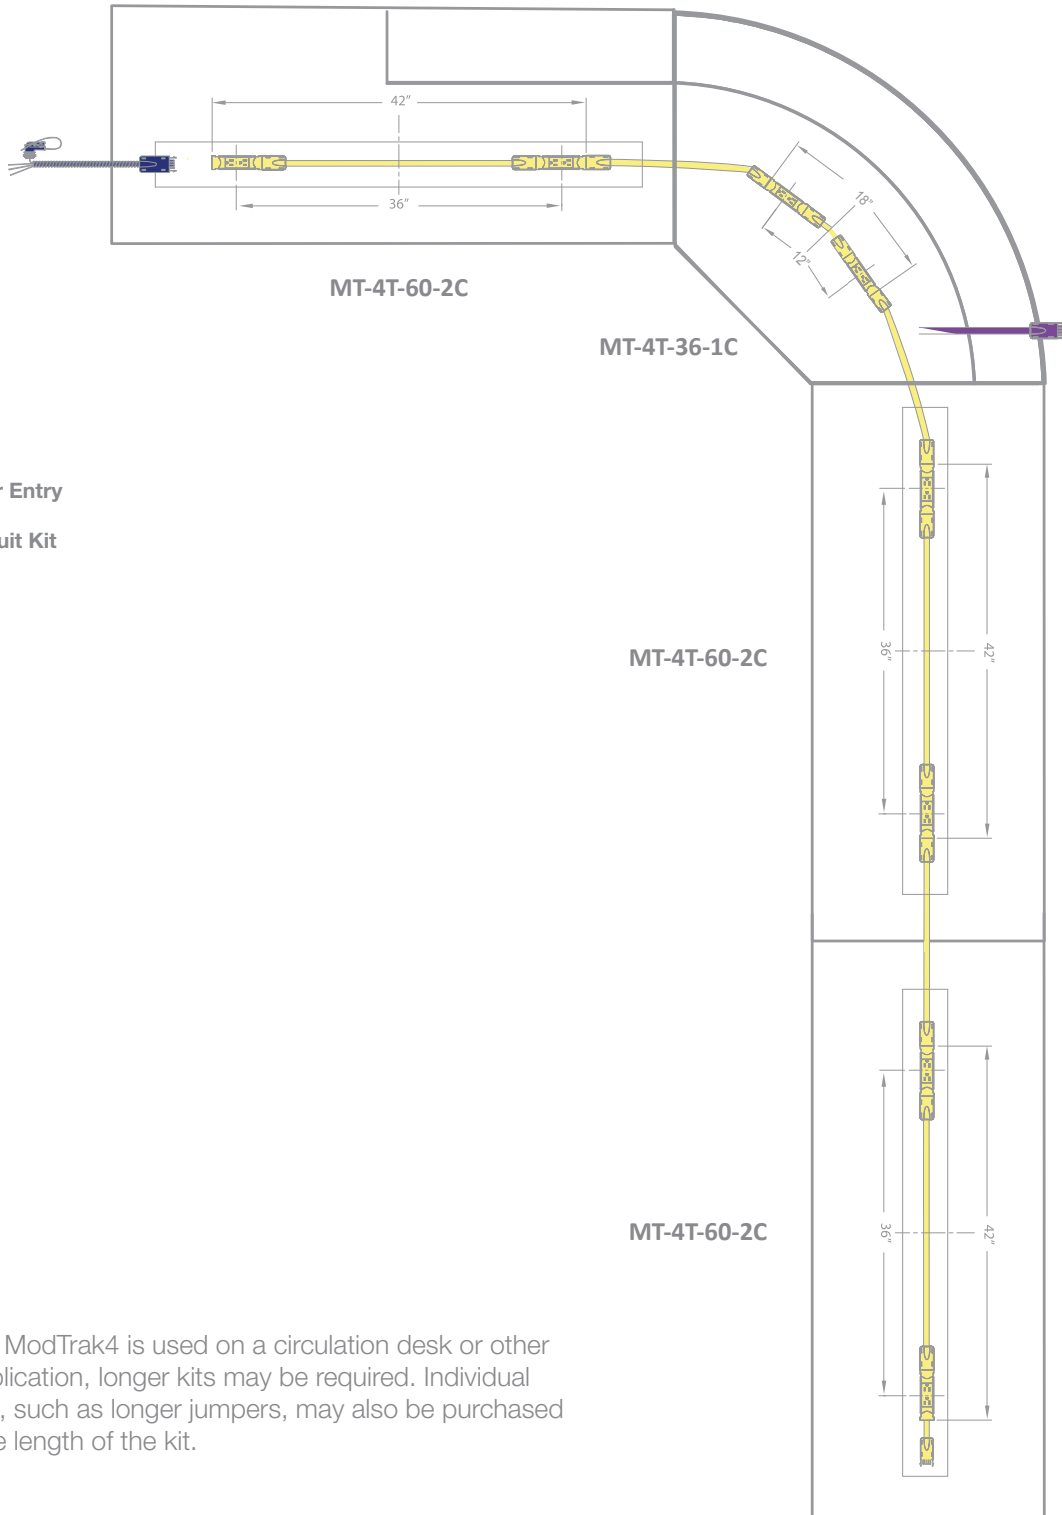

**Note:** When ModTrak4 is used on a circulation desk or other lengthier application, longer kits may be required. Individual components, such as longer jumpers, may also be purchased to extend the length of the kit.

# Accessories

## Grommets



A25GD-



A30GU



A20GU

### Standard Features:

- Plastic wire grommet
- Adjustable hole openings for A30GU & A20GU
- 50mm & 80mm Round
- Purchase installed or un-installed
- Black finish (A25GD- is also offered in white)
- A25GD- is used for vertical conditions

## Cable Grip



ACG-5B

### Standard Features:

- Plastic cable grips
- Available in black
- 5.25"L x 1.75"W 1.5"H

**Note:** automatically comes standard with any power unit installed in the Full Time or Engage seating lines.

## IncogNeato




AVM32-VERTS2

### Standard Features:

- Flexible coil design
- Works with sit-to-stand desks as well as fixed-height work surfaces
- Easy to install and can be detached quickly for routing cables by way of screws
- High-impact ABS material
- Available in Silver
- 2.75" inside diameter
- Stretches to over 70"

## Cord Storage Basket



CSB24

### Standard Features:

- Carbon steel basket tray
- Holds cords and cables with simple, open design
- Easy to install under desks or tables

## Cable Channel



AWM48

### Standard Features:

- PVC Wire management channel
- 2.5"W x 1.5"H x 48"

## Rotating CPU Holder



ACPU-CS-11

### Standard Features:

- Under-desk mounting kit
- Width adjusts from 5.25" to 9.25"
- Height adjusts from 15.375" to 21"
- Rotates 180 degrees

## CPU Holder



ACPU-CS-10

### Standard Features:

- Under-desk mounting kit
- Width adjusts from 5.25" to 9.25"
- Height adjusts from 15.375" to 21"

## Articulating Keyboard Combo




AAK1003

### Standard Features:

- Articulating keyboard mechanism
- Mouse tray clamps to mechanism
- Slide out, swivel and tilt, lock positions
- Includes padded wrist rest

# Accessories

## \*Open Port Voice/Data Adapter Kits



Voice/Data Adapter Tree

Voice/Data Adapter kits are included with all power access devices that are configured with Open Ports.

The Voice/Adapter kit allows jacks and couplers to be used in any power access device that is configured with Open Ports.

Choose the appropriate adapter, install your jack or coupler and snap it into place into the Open Port's modular window.

Adapter trees are delivered in black or white to match your device. Note: for configurable units only.

## Bag Hook



BPH

### Standard Features:

- For storage of bags underneath most tables and desks

## Cable Clip



AD-2DG

### Standard Features:

- Snaps to table leg to keep wires organized.
- Easy to install with no hardware required.
- Available in 2" dia. (while supplies last)
- Available in graphite  
*\*Phasing out*

## Universal Wire Manager



AUWMT-02/03

### Standard Features:

- Wire raceways for routing wires
- Adapts to most countoured surfaces over 1-5/8" in diameter
- Easy to open and close securely
- Available in silver or black

## Power Options By Product

Power Options by Product – Tables											
Power Units	Table Line										
	Derby Table	Cesar Table	Malibu Table	Milestone Table	Rally Table	Orbit Table	Grootable Table	Gtx Table	Gtx Carrel Table	Column Wrap	Valour Table
Aztech (AZ)											
Charge Up Dual (AMX)*											
Duet (DUF)											
Ensemble (ENS)*	•	•		•	•	•					•
Modulink (MDS) (daisy chain)*	•	•		•	•	•			•		•
Grommet Interchangeable Power											
Port (PRT) (fits 80mm hole)*	•	•		•	•		•	DF	•	•	•
Jolt (JLT) (fits 80mm hole)*	•	•		•	•		•	DF	•	•	•
Sparky (SPK) (fits 80mm hole)*	•	•		•	•		•	DF	•	•	•
Edge or On Surface											
Backstop (ABTP)	•	•	•	•		•	•	•			
Standley (STND)											
Dart (DRT)^	•	•					•	•			

Power Options by Product – Tables Continued										
Power Units	Table Line									
	Quorum Table	Kirby Table	Downtown Table	Zip Table	Nouvelle Table	Nomad Table	Vector Table	Rockford Adj	Anchor Table	
Aztech (AZ)			•							
Charge Up Dual (AMX)*	•	•		•	•					
Duet (DUF)										
Ensemble (ENS)*		•		•		•				
Modulink (MDS) (daisy chain)*	•	•				•				
Grommet Interchangeable Power										
Port (PRT) (fits 80mm hole)*	•	•		•	•	•				•
Jolt (JLT) (fits 80mm hole)*	•	•		•	•	•				•
Sparky (SPK) (fits 80mm hole)*	•	•		•	•	•				•
Edge or On Surface										
Backstop (ABTP)							•	•		
Standley (STND)										
Dart (DRT)^									•	

# Power Options By Product

Power Options by Product – Desks & Presentation							
Power Units	Desk Solutions				Presentation		
In Surface Power	Jane Desk	GTX Desk	Vee Student	Cesar Student	Indy Table	Crayon Table	Drift Table
Aztech (AZ)						•	
Charge Up Dual (AMX)*						•	
Duet (DUF)							
Ensemble (ENS)*					•	•	•
Modulink (MDS) (daisy chain)*							
Grommet Interchangeable Power							
Port (PRT) (fits 80mm hole)*	•	•			•	•	•
Jolt (JLT) (fits 80mm hole)*	•	•			•	•	•
Sparky (SPK) (fits 80mm hole)*	•	•			•	•	•
Edge or On Surface							
Backstop (ABTP)			•	•			
Standley (STND)							
Dart (DRT)^							

Power Options by Product – Tech & Makerspace										
Power Units	Tech & Makerspace				Tech & Makerspace					
In Surface Power	WCT Table	Cirrus Table	Z Table	SST Table	Stellar Table	Work+Box Dock	Work+Box Plank	Work+Box Island	Work+Box Lite	Edison Table
Aztech (AZ)										
Charge Up Dual (AMX)*										
Duet (DUF)										
Ensemble (ENS)*		•								
Modulink (MDS) (daisy chain)*	•	•								
Grommet Interchangeable Power										
Port (PRT) (fits 80mm hole)*	•	•	•	•	•			•		
Jolt (JLT) (fits 80mm hole)*	•	•	•	•	•			•		
Sparky (SPK) (fits 80mm hole)*	•	•	•	•	•			•		
Edge or On Surface										
Backstop (ABTP)					•	•	•	•	•	•
Standley (STND)										
Dart (DRT)^					•	•	•	•	•	

## Key

DF= Double Faced only

Modulink= Units greater than 6' apart require add'l 36" jumper

X = is a Promoted Pairing

\* Limited to 1-1/4" Th Tops

^Edge or undermount



# Power Options By Product

Power Options by Product – Occasional & Seating													
Power Units	Occasional						Seating						
In Surface Power	Forum Coffee Table	Timetable	Duo Connector Table	Duo Coffee Table	Full Time Ottobles	Classica Table	Full Time	Engage	Deuce Lounge	Duo Lounge	Pocket Lounge	Wink	Shirley
Aztech (AZ)			•	•						•			•
Duet (DUF)							•	•				•	
Ensemble (ENS)*					•	•							
Modulink (MDS) (daisy chain)*													
Grommet Interchangeable Power													
Port (PRT) (fits 80mm hole)*													
Jolt (JLT) (fits 80mm hole)*													
Sparky (SPK) (fits 80mm hole)*													
Edge or On Surface													
Backstop (ABTP)	•	•		•		•							
Dart (DRT)^	•	•		•	•		•	•	•	•	•		
Any products not listed do not have a recommended electrical paired device													

Key
Modulink= Units greater than 6' apart require add'l 36" jumper
X = is a Promoted Pairing
* Limited to 1-1/4"Th Tops
^Edge or undermount

## Warranty Information

Prices: All prices are F.O.B. the factory. Prices and specifications are subject to change without notice. Prices do not include applicable taxes, special handling or installation charges. Possession of a price list is not an offer to or agreement to sell. We reserve the right to change prices without notice. We are not responsible for typographical errors. In the event a price or description is found to be incorrect, the correct information will be communicated to you when the order is received.

Credit Terms: Open account status is only granted after a completed credit application is received and approved.

Payment Terms: Terms for open account are net 30 days. Terms for orders without open account will be determined by Mediatechnologies LLC on an order-by-order basis and may require prepayment or a 50% deposit with order and the balance prepaid before shipment.

Orders: Orders must be in writing. Faxed orders are acceptable. Processing of orders will not begin until a signed acknowledgment is received.

Acknowledgments: Orders are accepted, manufactured and invoiced based on written acknowledgments issued by Mediatechnologies LLC. All orders are considered correct as acknowledged. Notify Mediatechnologies LLC immediately of any order discrepancies. Acknowledged orders may not be changed or canceled without written consent from Mediatechnologies LLC.

Changes to orders: Changes to orders already in process may be subject to a fee covering the cost to make the requested change. If a fee is necessary a written authorization of acceptance will be required. All requests for changes are subject to approval by Mediatechnologies LLC.

Cancellation of orders: All orders received by Mediatechnologies LLC are considered firm and cannot be canceled without our approval. A cancellation fee may be required based upon cost incurred by Mediatechnologies LLC prior receipt of a cancellation request.

Returns: Returns are not accepted without a Return Goods Authorization issued by Mediatechnologies LLC. Unauthorized returns will not be accepted. Returns may be subject to a restocking fee.

Shipping Terms: All orders will be shipped F.O.B. shipping point with freight charged collect. Shipping weights listed are net.

Routing: Shipments will be routed "best way" or as specified. Instructions will be followed as closely as possible, however, Mediatechnologies LLC reserves the right to make changes due to local conditions or other circumstances.

Freight Damage: Legal title to merchandise passes to the buyer upon acceptance by the carrier. All cartons must be carefully inspected at the time of delivery. Visible damage should be noted on the delivery receipt. In the case of concealed damage, the carrier must be notified within (5) days. It is the buyer's obligation to seek recourse against the shipper.

Shortages: Shipments should be inspected upon receipt for shortages. Shortages must be reported to Mediatechnologies LLC in writing within (5) days of receipt.

Shipping Address: **mediatechnologies®**  
892 Industrial Park Drive  
Shelby, MI 49455

Warranty: All items manufactured by Mediatechnologies LLC, home of mediatechnologies® and elements by mediatechnologies are guaranteed against defects for a period of five (5) years from the date of purchase. We will repair or replace, in our discretion, any defective item without cost to our customer. This is the customer's sole and exclusive remedy against us. No delay in shipment or delivery shall give rise to any liability for damages whatsoever. We are not liable for defects caused by customer or any third party. Customer is not authorized to make any repairs whatsoever or to deduct any amount from the purchase price. In no event shall our liability under this warranty exceed the purchase price. In no event shall we be liable for incidental, special or consequential damages. We disclaim all other warranties, express or implied, as to any matter whatsoever, including without limitation, quality, design, performance, specifications, samples, condition, merchantability and fitness for any particular purpose. No action may be commenced for breach of the warranty more than six months after the cause of action accrues and any such action may only be brought in the county of Oceana, State of Michigan.



892 Industrial Park Drive  
Shelby, MI 49455  
P: 231.861.2194  
F: 231.861.6678  
www.mediatechnologies.com  
sales@mediatechnologies.com

connect electrical 240709

