

ROCKFORD JR

Tables



RFJ-C3672CR

36"D X 72"W X 14.25"-24.25"H

ROCKFORD JR

Rectangle



ROCKFORD JR RECTANGLE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C2436	24	36	14.25-24.25
RFJ-C2442	24	42	14.25-24.25
RFJ-C2448	24	48	14.25-24.25
RFJ-C2460	24	60	14.25-24.25
RFJ-C2472	24	72	14.25-24.25
RFJ-C3036	30	36	14.25-24.25
RFJ-C3042	30	42	14.25-24.25
RFJ-C3048	30	48	14.25-24.25
RFJ-C3060	30	60	14.25-24.25
RFJ-C3072	30	72	14.25-24.25

Beanie



ROCKFORD JR BEANIE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3060BNR	30	60	14.25-24.25

Square



ROCKFORD JR SQUARE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C4242	42	42	14.25-24.25
RFJ-C4848	48	48	14.25-24.25
RFJ-C6060	60	60	14.25-24.25

Diamond



ROCKFORD JR DIAMOND STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3242DM	32	42	14.25-24.25
RFJ-C3746DM	37	46	14.25-24.25

Trapezoid



ROCKFORD JR TRAPEZOID STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C30TRP	30	30	14.25-24.25

Pickle



ROCKFORD JR PICKLE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3660G	36	60	14.25-24.25

Sprocket



ROCKFORD JR SPROCKET STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C6060S	60	60	14.25-24.25

Flair



ROCKFORD JR FLAIR STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3060FLR	30	60	14.25-24.25

Wave



ROCKFORD JR WAVE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3060WR	32.5	59.5	14.25-24.25

Raetsel



ROCKFORD JR RAETSEL STANDARD SIZE

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C4565RL	45	65	14.25-24.25

Round



ROCKFORD JR ROUND STANDARD SIZES

MODEL	DIAMETER"	HEIGHT"
RFJ-C0042	42	14.25-24.25
RFJ-C0048	48	14.25-24.25
RFJ-C0060	60	14.25-24.25

Squircle



ROCKFORD JR SQUIRCLE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3636SQR	36	36	14.25-24.25
RFJ-C4242SQR	42	42	14.25-24.25
RFJ-C4848SQR	48	48	14.25-24.25
RFJ-C5454SQR	54	54	14.25-24.25
RFJ-C6060SQR	60	60	14.25-24.25

Pac Man



ROCKFORD JR PAC MAN STANDARD SIZES

MODEL	DIA	HEIGHT"
RFJ-C0042PAC	42	14.25-24.25
RFJ-C0048PAC	48	14.25-24.25

Secil



ROCKFORD JR SECIL STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3772SC	37	72	14.25-24.25

Crescent



ROCKFORD JR CRESCENT STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3672CR	36	72	14.25-24.25

"D" Shape



ROCKFORD JR "D" STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C3672D	36	72	14.25-24.25
RFJ-C4872D	48	72	14.25-24.25
RFJ-C6072D	60	72	14.25-24.25

Clover



ROCKFORD JR CLOVER STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RFJ-C4848CL	48	48	14.25-24.25
RFJ-C6060CL	60	60	14.25-24.25

Quarter Round



ROCKFORD JR QTR ROUND STANDARD SIZES

MODEL	DIAMETER	HEIGHT"
RFJ-C36QR	24/36	14.25-24.25

ROCKFORD JR



RFJ-C6060CL
Clover Shape

ROCKFORD JR

- A variety of shapes and sizes allow collaboration in an ever-changing environment.
- 1-1/4" thick top with high-pressure laminate work surface and PVC edgebanding.
- Rigid 14-gauge two-piece steel adjustable legs, 14.25" to 24.25" height with glides. (The addition of casters will change the adjustable height range to 16.25" to 26.25")

To Order, Choose Finish Selections & Options


Work Surface: Choose from our selection of high pressure laminates.

Edge: Choose from our selection of PVC edges.

Note: Sprocket, Beanie and Flair-top tables receive 2" radius corners.

Base: Choose from our selection of powder coats.

See **mediatechnologies'** finish selections at <https://www.mediatechnologies.com/resources/finishes>

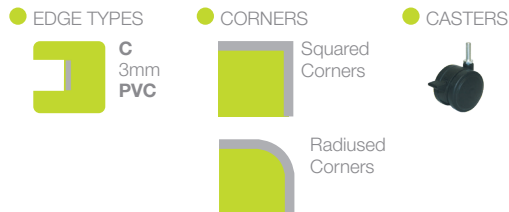

General Specifications

Work Surface: Table tops are 1-1/4" thick, with a 1-1/8" thick, three-ply particleboard core with .050 high-pressure laminate top and a .030" or thicker phenolic backer. Edges are 3mm PVC.

Adjustable Leg: Each leg is composed of an outer steel tube and an inner steel tube that can slide within it. The outer steel tube has a welded mounting plate that is 1/8" thick steel, welded to outer leg at the top and a reinforcement gusset of 1/8" thick steel, welded to mounting plate and outer leg. The outer tube also includes an inner ABS collar that prevents marring of the inner tube finish while sliding during adjustment. Each leg is provided with a leveling glide at the bottom.

Outer Tube: 14 gauge steel, 1-1/2" outer diameter, approx. 1-1/4" inner diameter. Perforated near the bottom with pass-through holes for (2) adjustment screws.

Inner Tube: 14 gauge steel, 1-1/4" outer diameter. Perforated and tapped for adjustment screws on 1" center to center distance providing for an adjustment range of 4". Adjustment screws must thread into inner leg and not just contact it.

Gusset: 1/8" thick steel, welded to mounting plate and outer tube.

Mounting Plate: 1/8" thick steel, welded to outer tube and gusset. Each leg is mounted to the table with seven (7) 1" #12 wood screws. Insert & machine thread screw (metal-to-metal) available upon request.



cs-rockfordjr-211230

892 Industrial Park Drive
Shelby, MI 49455
P: 231.861.2194
F: 231.861.6678
www.mediatechnologies.com
sales@mediatechnologies.com

PURE MICHIGAN®